


# S150 SKID-STEER LOADER SPECIFICATIONS

## DIMENSIONS

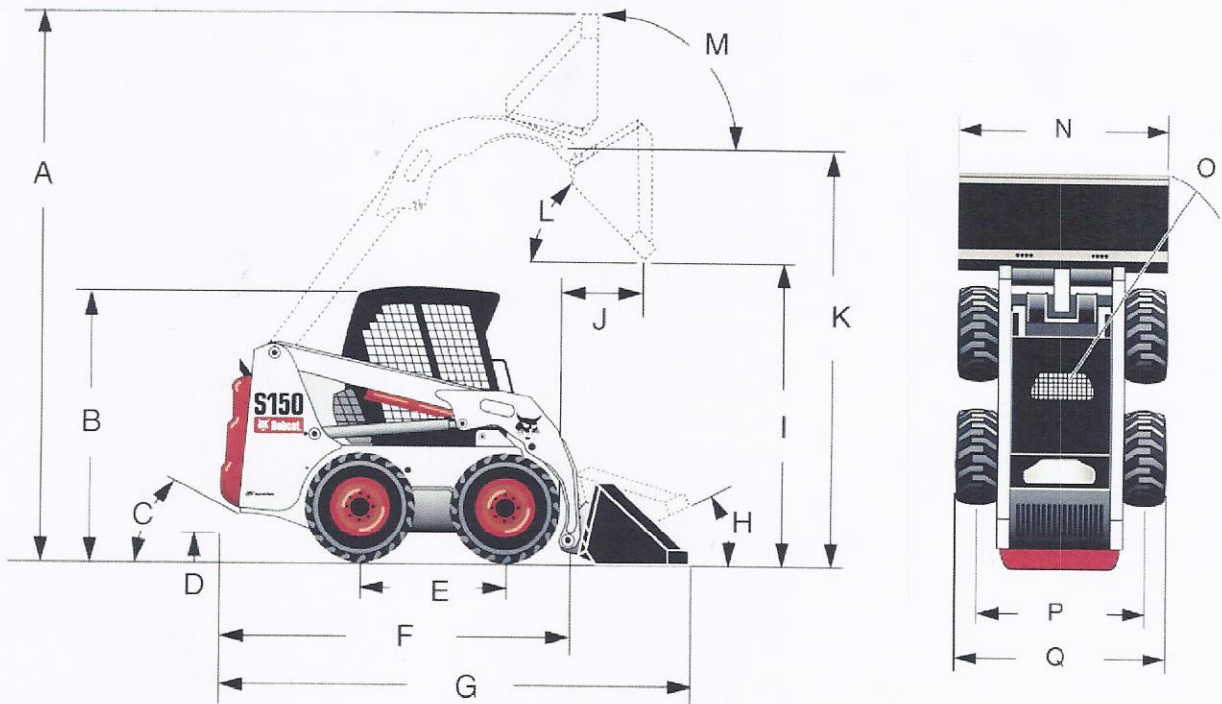

A) Operating Height .....	148.0" (3759 mm)	N) Width (over bucket)	
B) Height with Operator Cab .....	76.3" (1938 mm)	62" Bucket .....	62.0" (1575 mm)
C) Angle of Departure .....	23°	68" Bucket .....	68.0" (1727 mm)
D) Ground Clearance .....	7.5" (191 mm)	74" Bucket .....	74.0" (1880 mm)
E) Wheelbase .....	40.6" (1030 mm)	O) Turning Radius with Standard Bucket	82.4" (2093 mm)
F) Length without Attachment .....	101.8" (2586 mm)	Rear Clearance of Machine .....	62.2" (1579 mm)
G) Length with Standard Bucket .....	130.3" (3309 mm)	P) Wheel Tread	
H) Rollback @ Carry Position .....	26°	10-16.5 .....	55.1" (1400 mm)
I) Dump Height with Standard Bucket .....	86.5" (2197 mm)	10-16.5 with offset rims .....	48.5" (1232 mm)
J) Dump Reach @ Maximum Height .....	18.13" (461 mm)	31.5x13-16.5 .....	58.4" (1483 mm)
K) Height to Bucket Hinge Pin .....	114.5" (2908 mm)	Q) Width (over tires)	
L) Dump Angle @ Maximum Height .....	44°	10-16.5 .....	66.0" (1676 mm)
M) Rollback Fully Raised		10-16.5 with offset rims .....	60.0" (1524 mm)
@ Maximum Height .....	92°	31.5x13-16.5 .....	71.6" (1818 mm)
Carry Position .....	9.0" (229 mm)		

## PERFORMANCE

Rated Operating Capacity (SAE J732) .....	1500 lbs. (680 kg)
Rated Operating Capacity with Counterweight option .....	1600 lbs. (726 kg)
Tipping Load (SAE) .....	3101 lbs. (1407 kg)
Operating Weight (SAE) .....	5935 lbs. (2692 kg)
Travel Speed .....	7.3 mph (11.8 km/hr)
Lift Breakout Force (SAE) .....	3200 lbs. (1451 kg)
Tilt Breakout Force (SAE) .....	3050 lbs. (1383 kg)
Push Force .....	3950 lbs. (1792 kg)